

XMM 2600ST

9-axis Multi-tasking Machine

HYUNDAI WIA Multi-tasking Machine



Technical Leader

Multitasking Machine **XM2600ST**, designed by HYUNDAI WIA with years of expertise and the latest technology, is designed to maximize productivity by utilizing mill head and lower turret.

XM2600ST

Max. Turning Dia.	mm(in)	Mill : Ø660 (Ø26") / Turret : Ø410 (Ø16.1")
Max. Turning Length	mm(in)	1,540 (60.6")
Chuck Size	inch	1st : 10" / 2nd : 10"
Bar Capacity	mm(in)	1st : Ø81 (Ø3.2") / 2nd : Ø81 (Ø3.2")
Spindle Speed	r/min	1st : 4,000 / 2nd : 4,000
Max. Sp. Power	kW(HP)	1st : 30 (40) / 2nd : 30 (40)
Mill Head Speed	r/min	12,000
Max. Mill Head Power	kW	22 (29.5)
Travel (X1/Y/Z1/X2/Z2/A)	mm(in)	695/300{±150}/1,585/235/1,540/1,595 (27.4"/11.8"{±5.9"}/62.4"/9.3"/60.6"/62.8")
ATC - No. of Tools	EA	40 [80] (CAPTO C6)
Turret - No. of Tools	EA	12 [BMT65]

[] : Option

XM 2600ST

9-axis Multi-tasking Machine

- The adoption of a milling head with a built-in motor B axis (0.0001°) enables the operator to perform turning and milling works in perfect harmony
- Expanded machining area by shortening the length of the mill head : 550 mm (21.7") → 420 mm (16.5")
- Y-axis travel distance increased : 250 mm (9.8") → 300 mm (11.8")
- Application of CAPTO C6 tool for high speed complex machining
- The model features built-in 1st & 2nd-spindles with high power and high torque





Applications & Parts

VACUUM PUMP
ROTOR



IMPELLER



MOUNTING
SHELL




ARTIFICIAL
BOPE



HOUSING,
ELECTRIC MOTOR



BLADE,
COMPRESSOR

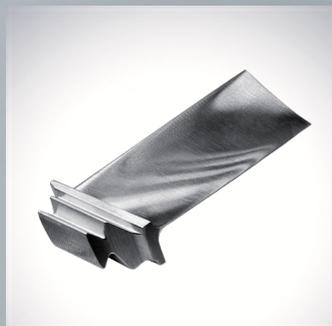

HOUSING,
ENGINE




CRANKSHAFT



01 BASIC STRUCTURE

High Productivity 9-axis Multi-tasking Machine

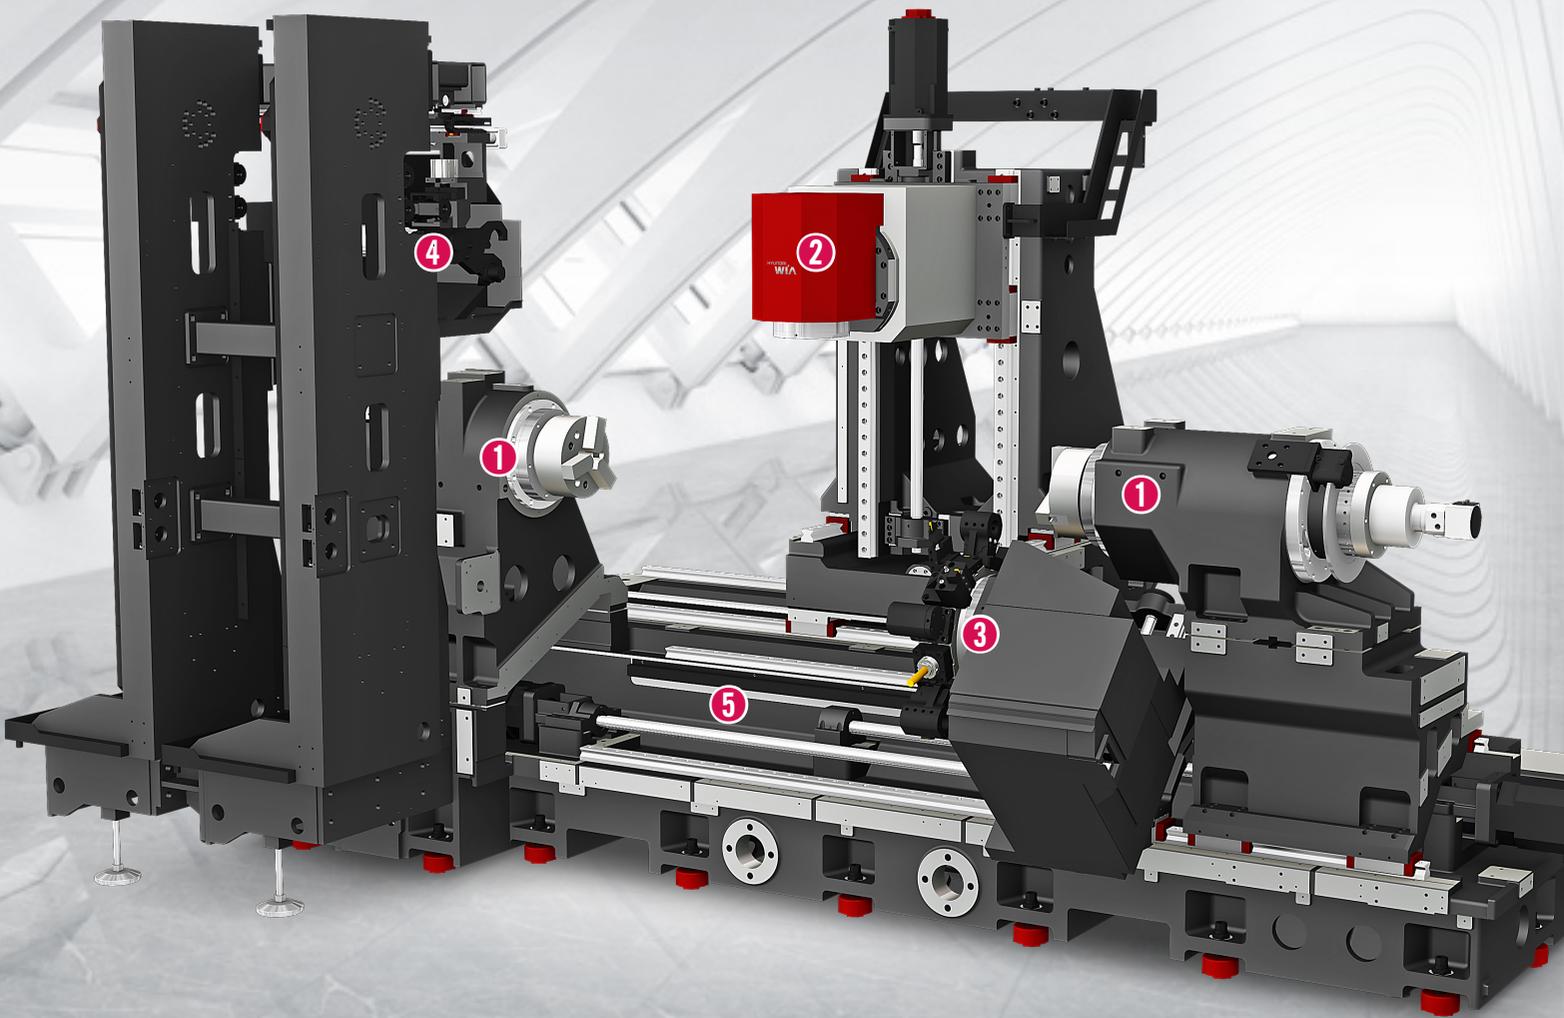

9-AXIS MULTI-TASKING MACHINE



1 Built-in Spindle (1st/2nd)

XM2600ST 1st/2nd built-in spindle minimizes vibration to allow machining of the highest precision.

• Chuck Size : 10" • Speed : 4,000 r/min



2 Compact Mill Head

The B-axis control mill head is mounted with a high resolution encoder having a built-in motor and 0.0001° indexing ability to secure high positioning precision.

• Driving Methode : Built-in • Speed : 12,000 r/min



3 Lower Turret (Std. Turning Turret / Opt. BMT65 Mill Turret)

The lower turret ensures high-speed machining of complicated shapes in precision only with one-time setting of workpiece machined with the mill head.

• Type : Servo [Opt. BMT65 – Mill Speed : 5,000 r/min]



4 ATC & Magazine

The installation of magazine on the front provides efficient tool change and tool setting. Magazine with chain driving method provides 40 tools as standard, and 80 tools as option.

• Tool Shank Type : CAPTO C6 • Tool Change Step : 4 Step

SECURE BED STRUCTURE

5 High Precision & Rigidity Bed

The new bed design has especially been interpreted and designed with the FEM method to minimize various factors such as thermal distortion and vibration, which could take place during machine.


Also to secure machining, XM2600ST is designed low bed structure compared to previous model.



XM2600ST

02 HIGH-SPEED TRAVEL

High-speed, high-productivity, high-precision multi-tasking machine

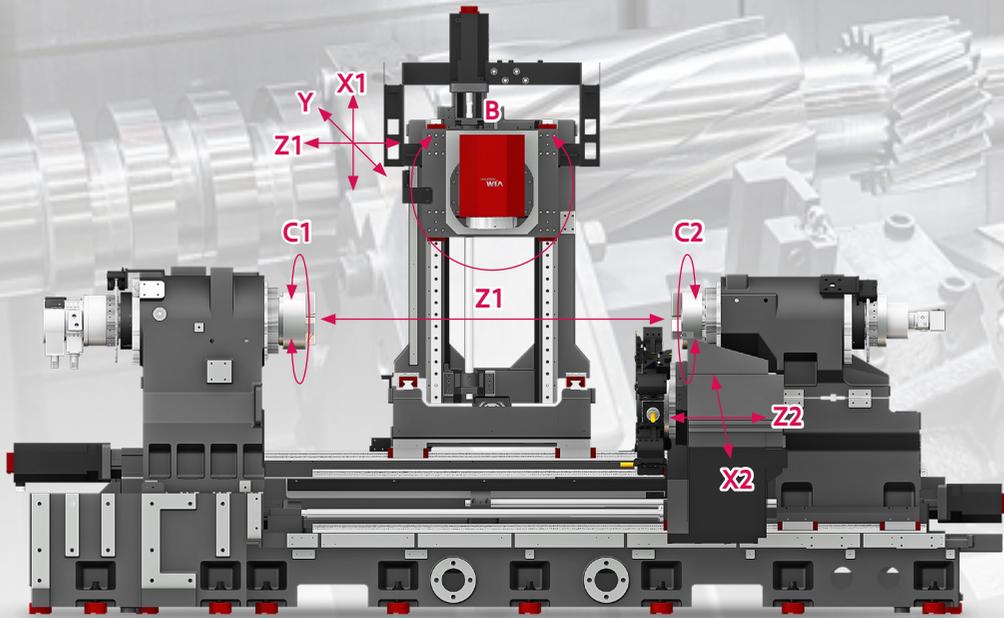

Travel (X1/Z1/Y/X2/Z2/A)

695/1,585/300/235/1,540/1,540 mm (27.4"/11.8"/62.4"/9.3"/60.6"/62.8")

Rapid Traverse Rate (X1/Z1/Y/X2/Z2/A)

48/48/36/24/36/30 m/min

B-axis

240°(±120°)

HIGH SPEED & HIGH PRECISION

Y-AXIS



Cross Type Y-axis

The cross type Y-axis ensures excellent positioning accuracy and provides easier programming and correction of programs which helps in enhancing productivity.

Wide Machining Range of Y-axis

The adoption of Y-axis with wide cutting range of 300mm(11.8") allows Y-axis cutting in a single step without having to rotate the C-axis, and improves the cutting pitch and precision level.

Previous Model	250 mm (9.8")
XM2600ST	300 mm (11.8") 50 mm Increase

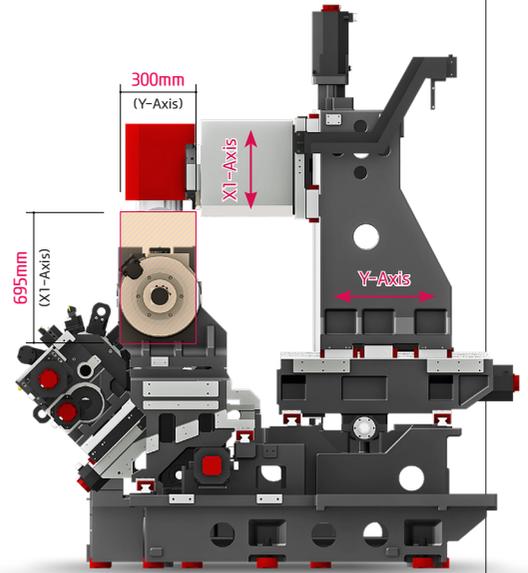

GUIDE WAY

High-Speed Roller LM Guideway

Linear roller guideways are applied to reduce non-cutting time and bring high rigidity.

Ball Screw Nut Cooling (Z1/Y/X1 axis : Std.)

The Z1, Y, and X1 axes, which have a higher transfer frequency than other axes, use the ball screw nut cooling method as standard to minimize thermal displacement due to the frequent repetitive motion.



Linear Scale **OPTION**

Linear scales on all axes providing high precision positioning accuracy and compensates for ball screw thermal displacement ensuring extremely precise machining.

In addition, the absolute type linear scale is installed in close proximity to the ball screw of each axis.




XM2600ST

03 COMPACT MILL HEAD


Milling heads for machining complex shapes

HYBRID WIA


Machining Variation




OD Cutting




Face Milling




Drilling




OD Drilling




ID Cutting




Ball-End Milling




ID Threading



End Mill



Cut-Off




Angular Machining

MACHINING PROCESS WITH ONLY ONE INITIAL SETTING

Millhead for multi-tasking

The XM2600ST is the culmination of HYUNDAI WIA's technological prowess, capable of machining any product of complex shape required by a customer through its mill head and lower turret.

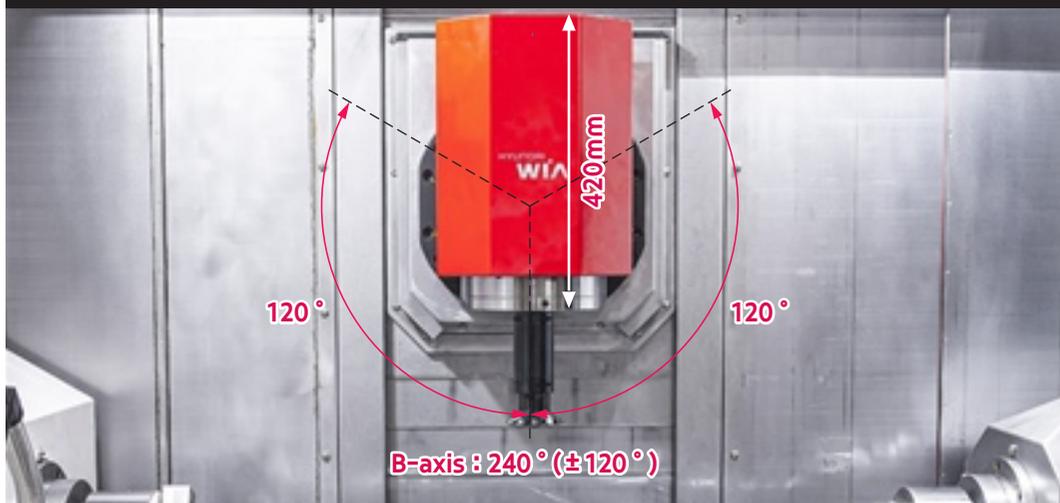

Expansion of machining range

The length of the mill head has been reduced by 130mm (5.1") compared to the previous model to expand the machining range. <550 → 420mm (21.7" → 16.5")>.

Compact Mill Head with a B-axis Operated by a High-precision DDM

The mill head is a product of combining HYUNDAI WIA's latest technologies. The B-axis operated by DD motor method (0.0001°) to eliminate rotational backlash and spindle 1 (0.0001°) together can machine impellers, blades and other simultaneous 5-axis machining (standard application).

Also, it can perfectly carry out machining of workpieces with complex shape including sloped surface, etc

Mill Head Specifications

Driving Method	Speed	B-axis Travel	Indexing Angle	Tool Shank
Built-in	12,000 rpm	240° (-120°~+120°)	0.0001°	CAPTO-C6

CAPTO-C6

CAPTO-C6, which allows double-sided circulation, is applied as a standard for maximum cutting capability.

- Ideal over load analysis
- Decreased tool change time by short taper / Excellent cutting ability



XM2600ST

04 HIGH PRECISION SPINDLE

Long Lasting, High Accuracy & Excellent Performance




1ST/2ND BUILT-IN SPINDLE FOR HIGH PRODUCTIVITY

SPINDLE

Built-in Spindle (1st/2nd)

The 1st and 2nd spindles with a built-in motor structure can minimize the vibration and heat generated during high-speed rotation, which makes them ideal for high-precision machining.

Also, Machines with a 2nd spindle can perform secondary operations with a single setup, increasing flexibility and productivity.

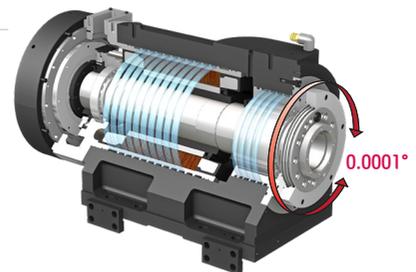

C-Axis Control – C-axis control of 1st and 2nd spindle allows machining of various products

1st Sp. C1-axis : 0.0001°


2nd Sp. C2-axis : 0.001°

Spindle Oil Cooling

The 1st/2nd spindles have been fitted with cooling units as a standard feature to minimize thermal displacement generated during cutting works, maintain a constant temperature, and increase cutting stability.

Spindle Specifications

Driving Method	Speed	Power (Max./Cont.)	Torque (Max.)
Built-in	4,000 rpm	30/22 kW (40/29.5HP)	724 N·m (534 lbf-ft)

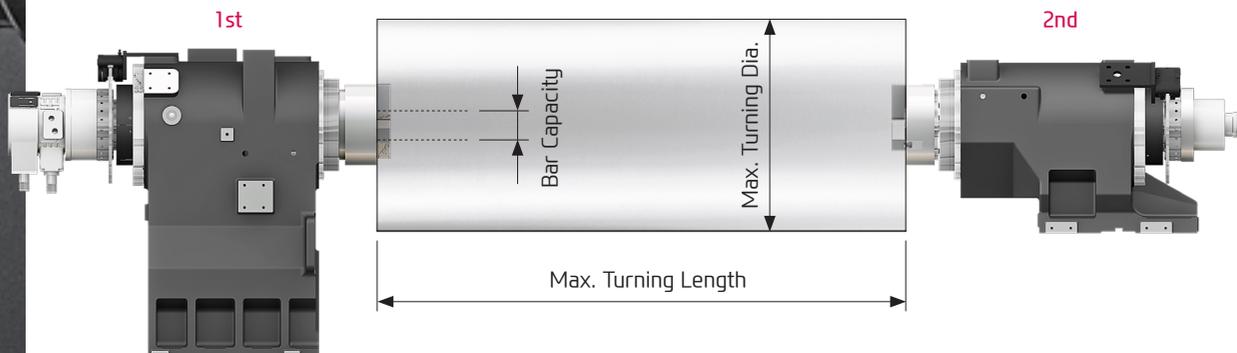

Chuck Size	Max. Turning Length	Max. Turning Dia. (Mill/Turret)	Bar Capacity
10"	1,540 mm (60.6")	Ø660/Ø410 mm (Ø26"/Ø16.1")	Ø81 mm (Ø3.2")

XM2600ST

05 BMT TURRET

High Speed, High Accuracy, Highly Reliable BMT Turret



Turret-attached Type Rest **OPTION**

It guarantees machining stability by preventing tilt and shaking during machining of products such as long shafts. SLU3.2 Rest can also be applied for machining large workpieces.

Turret Specifications

No. of Tools

12_{EA}

Tool Size (O.D/I.D)

□ 25/Ø40 mm (□ 1"/Ø1 1/2")

Indexing Time

0.2_{sec}


SERVO MOTOR CONTROL - BMT TURRET

TURRET

Optional Mill Turret (Std. 12T Turning Turret)

The lower mill turret (Opt.) ensures the high-speed machining of complicated shapes in precision only with the one-time setting of an object to be machined with the mill head and complex machining.

- ⦿ Speed (rpm) : 5,000 r/min
- ⦿ Collet Size : $\varnothing 20$ (0.8") / ER32
- ⦿ Indexing Time : 0.2 sec

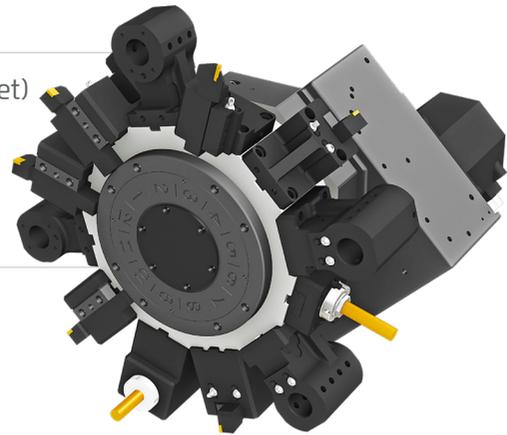

STRAIGHT MILLING HEAD



ANGULAR MILLING HEAD




Mill Tool Holder **OPTION**

Machining capability has increased with the addition of straight milling head tool holder, which can machine workpieces from the side, and angular milling head tool holder, which can perform I.D. operations.

SPECIAL TOOL

OPTION

XM2600ST can process high value-added products using a variety of rotating tools. In particular, multi-holders for attaching variety of tools to one holder, and eccentric rotary tool for handling eccentric parts without additional axis movement, which can realize integration of process with one machine.

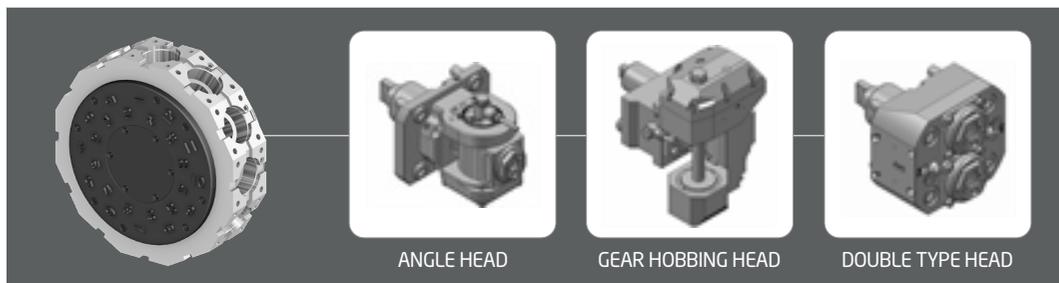

ANGLE HEAD

GEAR HOBBING HEAD

DOUBLE TYPE HEAD

❖ Consultation needed when ordering these options.

06 USER CONVENIENCE

Various Devices for User Friendly

The XM2600ST offers Ergonomic Design for Easy Operability and Maintenance.



Improved Access with Larger Front Door

The adoption of a larger front door makes crane access for cutting preparation works, such as setting up workpieces, much easier.

Highly Accessible Spindle

The spindle's ergonomic design improves access for the chuck and makes it easier to set up workpieces. The height from the floor to the center of the spindle has been carefully considered in order to improve the operator's convenience when setting up work pieces.

Operation Panel

The arms for the OP box and the OP box can rotate independently, which makes operating convenient depending on the workpiece setting or worker position thus allowing the user to easily move the arms to desired location.



Optional

HIGH RIGIDITY, TOOL CHANGE SYSTEM

AUTOMATIC TOOL CHANGE SYSTEM

ATC & Magazine

There is a magazine on the front side of the machine for efficient tool exchange and setting, and tool exchange operation is simplified and highly reliable. The tools are also fed in the quickest routes, which allows prompt replacement of tools.




ATC Side Repair Window (80 ATC)

You can easily access the ATC through the side repair window if inspection or cleaning of the ATC is necessary.



Automated Tool Attachment/ Detachment Device (Std.)

The automated tool attachment/detachment device uses an air cylinder for easy tool attachment/detachment.

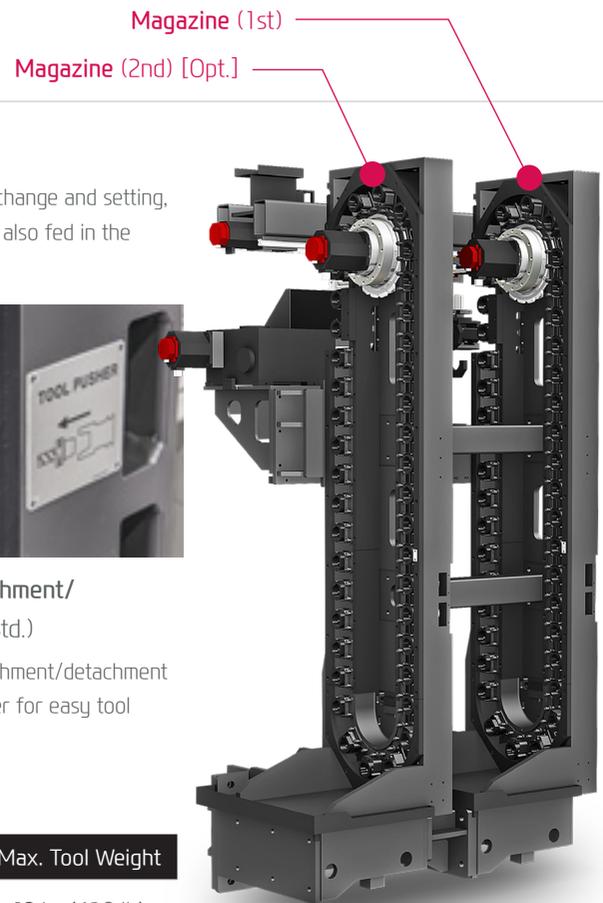

ATC & Magazine Specifications


No. of Tools	Max. Tool Length	Max. Tool Dia. (W.T/W.O)	Max. Tool Weight
40 [80] EA	450 mm (17.7")	Ø90/Ø130 (Ø3.5"/Ø5.1")	12 kg (46.3 lb)

1 Internal Maintenance Foothold (Std.)

There is a foothold within the machine for the worker to be able to maintain a stable posture when accessing the equipment.

2 Bed Lower Flushing (Std.)

The entire upper surface of the slide cover features a flushing structure, which allows the slide cover to be maintained in a clean state at all times (patented).

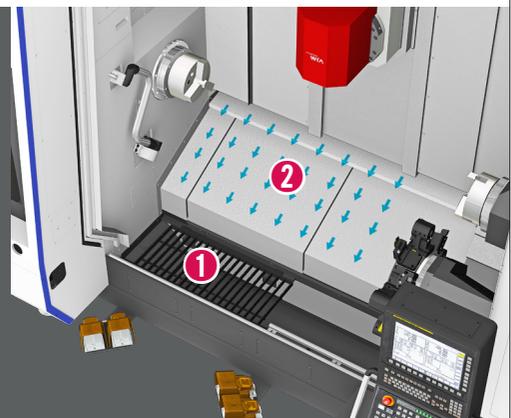

07 FANUC

The Compatible All-round Control

FANUC 31i-B5 PLUS

This is the core model of FANUC CNC with the performance of the world highest level.

With abundant functions and high-speed, highly-accurate and high-quality machining technology, it is the most suitable for a high-grade and machining center.

15" Touch Screen Monitor Applied

Control axes : 9 axes (X1, Y1, Z1, B1, X2, Z2, A, C1, C2)

Simultaneously controlled axes : 5 axes

Part program storage size : 4 Mbyte (1,024m)

No. of registerable programs : 1,000 EA

Tool offset pairs : 400 pairs

Look-ahead block : 1,000 block

Conversational auto program : Smart Guide i




Convenience is increased when inputting and outputting program. The USB port is available in addition to the former input/output methods such as CF memory card and LAN.

The XM2600ST has a 15" large monitor for enhanced visibility.



In particular, we can create more convenient use conditions by improving the operating environment such as program setup and simulation through a large screen.

ACAM (Automatic CAM)

Cloud-based automatic CAM S/W that automatically creates NC programs only by inputting drawing files

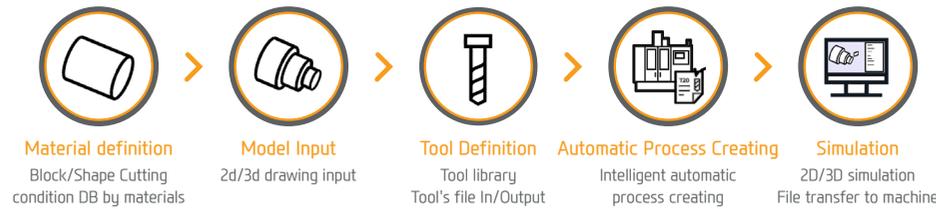

MMS (Machine Monitoring System)

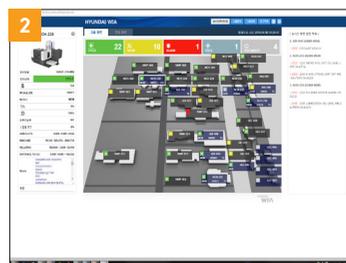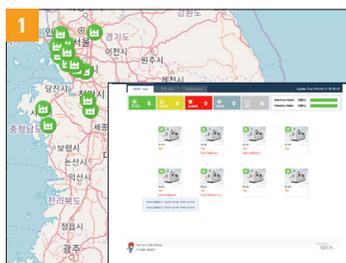


1. MMS Cloud

A cloud server-based equipment monitoring system for collecting and analyzing facility operation data.

2. MMS Edge

A client server-based tool monitoring system for collection/analysis of facility operation data. (Compatible with client MES / ERP interface)

SMART CNC (FANUC SMART PLUS)

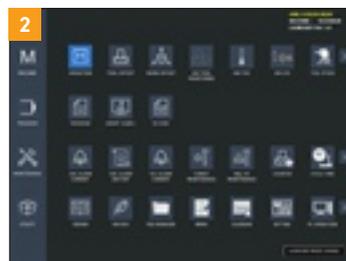

1. Dialogue Program (Smart Guide-i)

This software offers the maximum user convenience through dialogue manipulation from setup to processing. This includes writing processing programs and simulation checks.

2. LAUNCHER

This software offers shortcuts for quick access to specialized features and frequently used features.

SPECIFICATIONS

Standard & Optional

● : Standard ○ : Option ☆ : Prior Consultation


Spindle		XM2600ST
1st Sp. Hollow Chuck 3 Jaw	10"	●
1st Sp. Solid Chuck 3 Jaw	10"	○
2st Sp. Hollow Chuck 3 Jaw	10"	○
2st Sp. Solid Chuck 3 Jaw	10"	●
Standard Soft Jaw (1set)		●
Chuck Clamp Foot Switch		●
2 Steps Hyd. Pressure Device		☆
Spindle Inside Stopper		☆
Chuck Open/Close Confirmation Device		●
Chuck Pressure Check Switch		●
C-Axis (0.0001")		●
Mill Head		
Tool Shank Type	CAPTO C6	●
ATC & Magazine		
ATC Extension	40 Tool	●
	80 Tool	○
Lower Turret		
Tool Holder	12EA	●
	24EA	○
Mill Turret	BMT	○
Straight Milling Head (Radial)	Adapter Type, 2ea	○
Angular Milling Head (Axial)	Adapter Type, 2ea	○
Boring Sleeve		●
Drill Socket		●
Angle Head		☆
Tail Stock & Steady Rest		
Lower Tool Mount Steady Rest (SLU 3.2)		○
Coolant & Air Blow		
Standard Coolant (Mill Front)		●
Chuck Coolant (Upper Chuck)		○
Gun Coolant		○
Shower Coolant (Bed Flushing)		●
Through Spindle Coolant (Only for Special Chuck)		☆
Thru Coolant for Live Tool		☆
Chuck Air Blow (Upper Chuck)		○
2nd Spindle Air Blow		○
Turret Air Blow		☆
Air Gun		○
Through Spindle Air Blow (Only for Special Chuck)		☆
High-pressure Coolant	2.0/3.0/7.0 Mpa	○
Power Coolant System (For Automation)		☆
Coolant Chiller		☆
Chip Disposal		
Coolant Tank	620 ℓ (163.8 gal) Right Side	●
Chip Conveyor (Hinge/Scraper)	Front (Right)	○
Special Chip Conveyor (Drum Filter)		☆
Chip Wagon	Standard (180 ℓ [47.5 gal])	○
	Swing (200 ℓ [52.8 gal])	○
	Large Swing (290 ℓ [76.6 gal])	○
	Large Size (330 ℓ [87.2 gal])	○
	Customized	☆

Safety Device		XM2600ST
Back Spin Torque Limiter (BST)		●
Total Splash Guard		●
Chuck Hydraulic Pressure Maintenance Interlock		☆
Electric Device		
Call Light & Buzzer	3Color : ● ■ ■ B	●
Electric Cabinet Light		○
Remote MPG		●
Electric Circuit Breaker		○
AVR (Auto Voltage Regulator)		☆
Transformer	80kVA	○
Auto Power Off		○
Measurement		
Auto Q-Setter	Lower Turret	○
Work Close Confirmation Device (Only for Special Chuck)	TACO	○
	SMC	○
Tool Length Measuring Device (Mill Head)	Touch	○
	Contactless-PC4	○
Automatic Workpiece Measuring Device	RMP600	○
HWTM (Tool Monitoring System)		○
Linear Scale	X1/Y1/Z1 Axis	○
	X2/Z2 Axis	○
Coolant Level Sensor (Only for Chip Conveyor)		☆
Environment		
Air Conditioner		○
Oil Mist Collector		☆
Oil Skimmer (Only for Chip Conveyor)		○
MQL (Minimal Quantity Lubrication)		☆
Fixture & Automation		
Auto Door		○
Auto Shutter (Only for Automatic System)		☆
Sub Operation Panel		☆
Extra M-Code 4ea		○
Automation Interface		☆
Hyd. Device		
Standard Hyd. Unit : 4.5Mpa/45 ℓ (11.9 gal)		●
S/W		
HYUNDAI WIA Smart Software		●
Thermal Compensation		●
DNC software (HW-eDNC)		○
Machine Monitoring System (HW-MMS)		○
ETC		
Tool Box		●
Customized Color	Need Munsel No.	☆
CAD & CAM Software		☆


SPECIFICATIONS

Spindle Output/Torque Diagram


Spindle 4,000 rpm

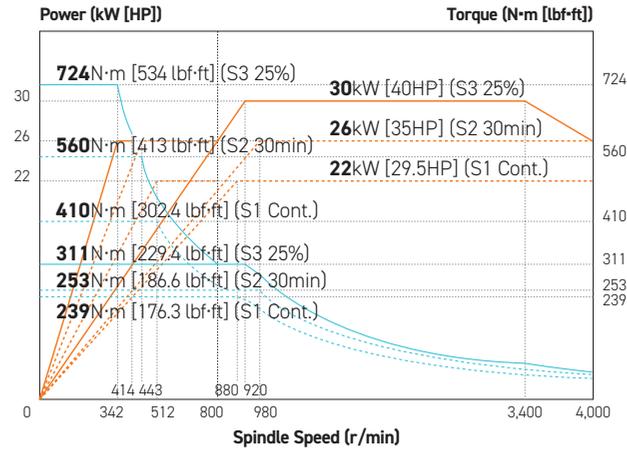

Mill Head 12,000 rpm

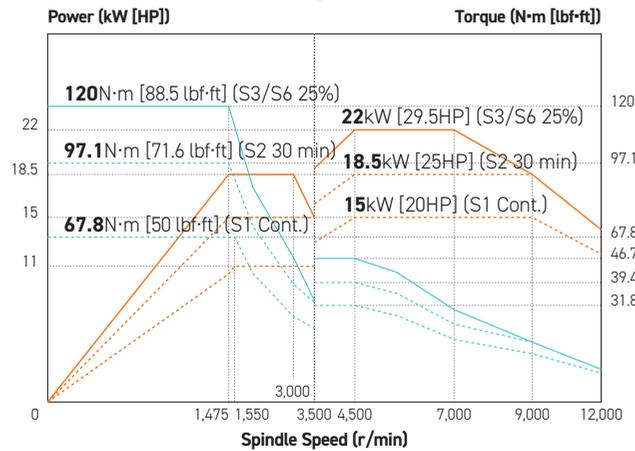


Mill Turret 5,000 rpm

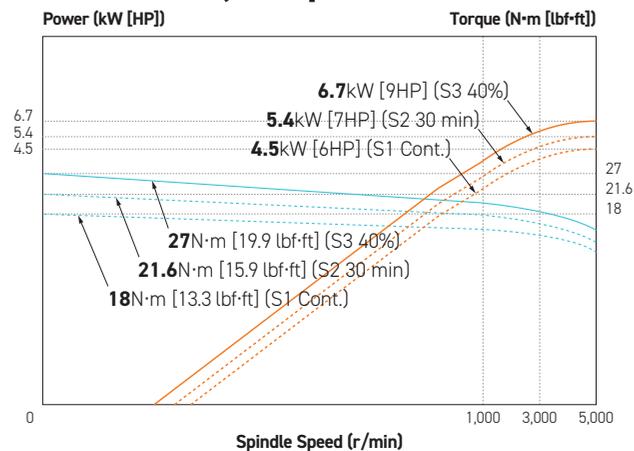

SPECIFICATIONS

External Dimensions




unit : mm(in)

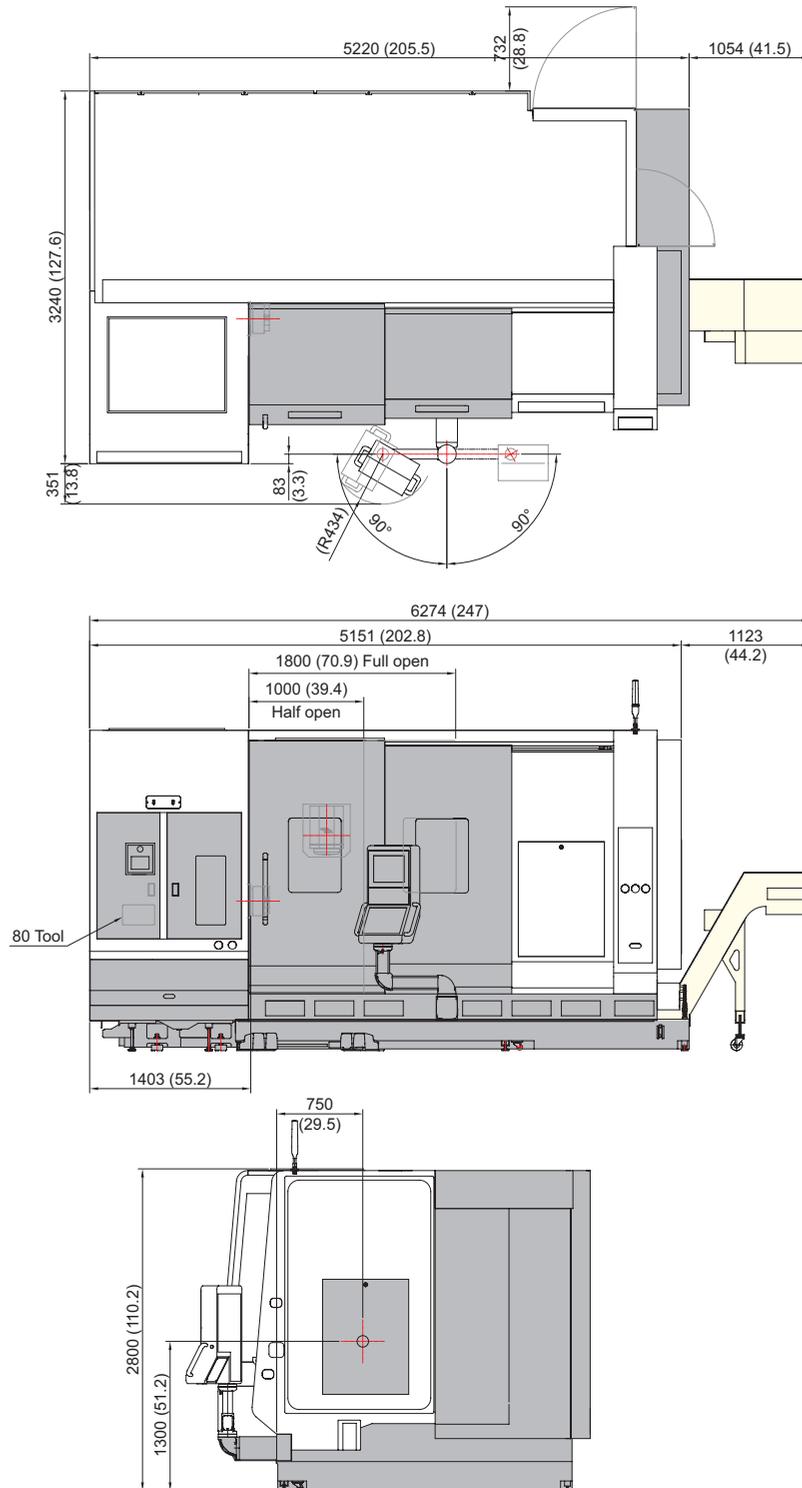

SPECIFICATIONS

Interference


unit : mm(in)

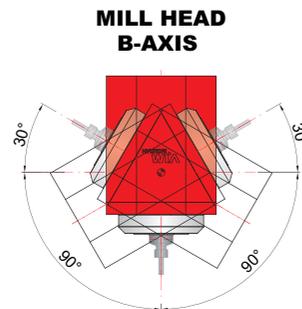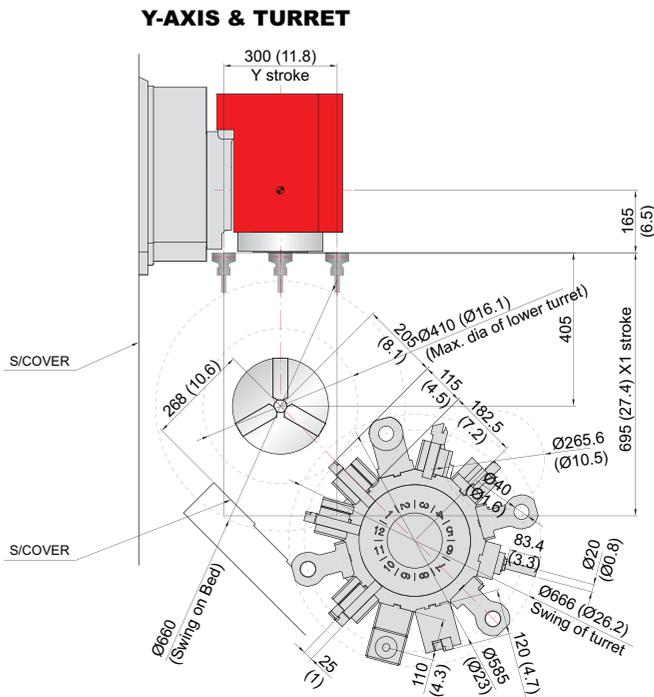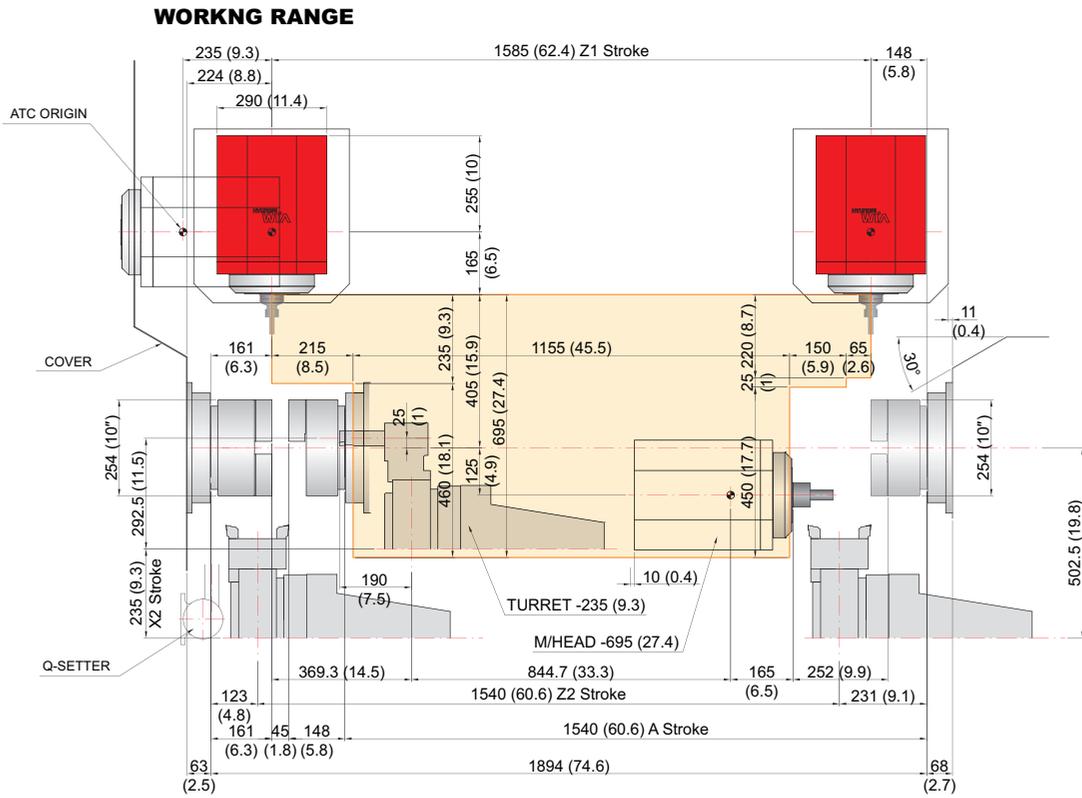

SPECIFICATIONS

Tooling System

unit : mm(in)

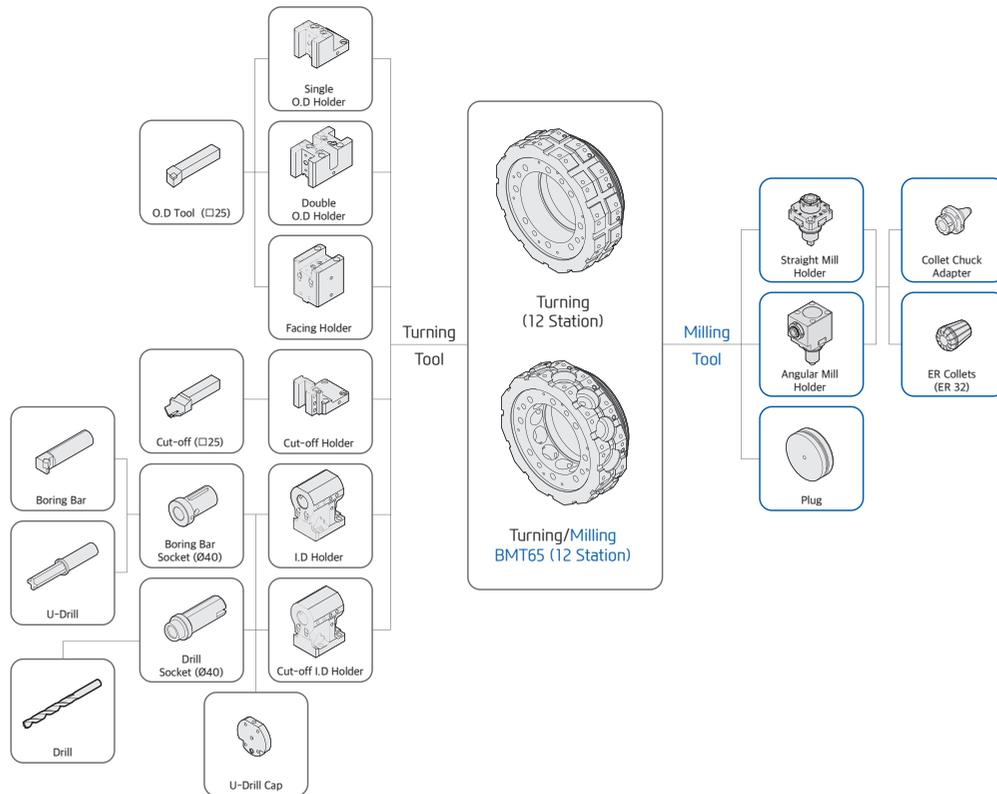

Tooling Parts Detail


ITEM			XM2600ST	
			Turning	Milling
Turning Holder	O.D Holder	Right/Left	3	2
		Double	2	2
	Facing Holder	1	1	
	Cutting Holder	1	1	
Boring Holder	I.D Holder	Single	3	2
	Off-set I.D Holder		2	2
	U-Drill Cap		1	1
Driven Holder	Straight Mill Holder		-	1
	Angular Mill Holder		-	1
Socket	Boring	Ø10 (Ø3/8")	1	1
		Ø12 (Ø1/2")	1	1
		Ø16 (Ø5/8")	1	1
		Ø20 (Ø3/4")	1	1
		Ø25 (Ø1")	1	1
		Ø32 (1 1/4")	1	1
	Drill	MT 1×MT 2	1	1
		MT 2	1	1
	ER Collet		-	1 Set
	Adapter Set		-	1 Set

SPECIFICATIONS


Tooling Travel Range

unit : mm(in)

OD Holder

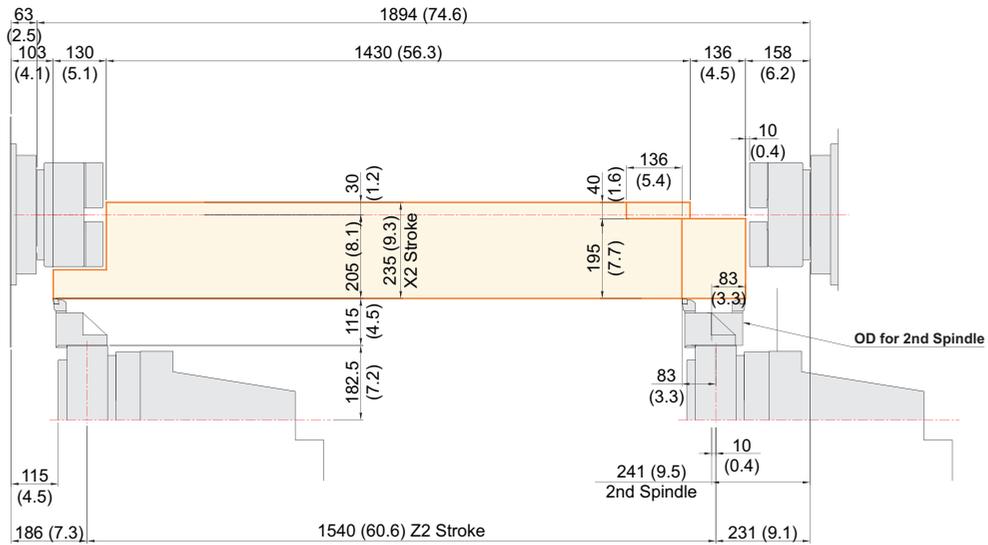

Boring Holder

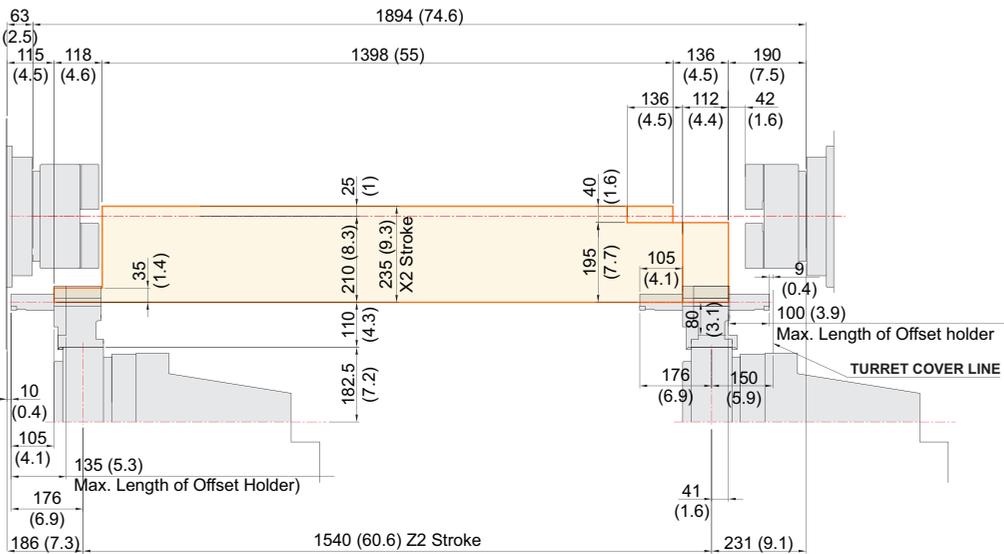


SPECIFICATIONS


Tooling Travel Range

unit : mm(in)

Angular Milling Holder

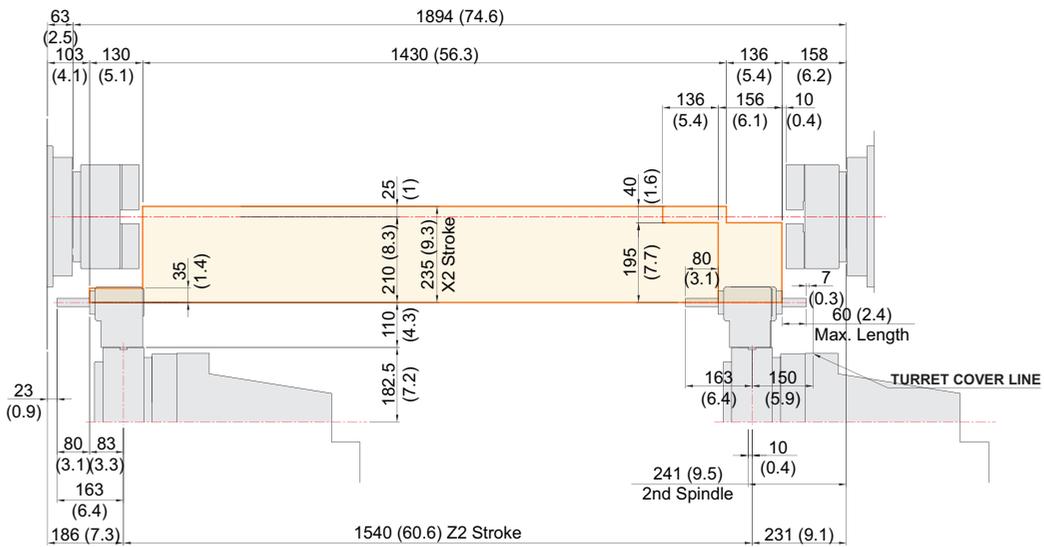

Straight Milling Holder

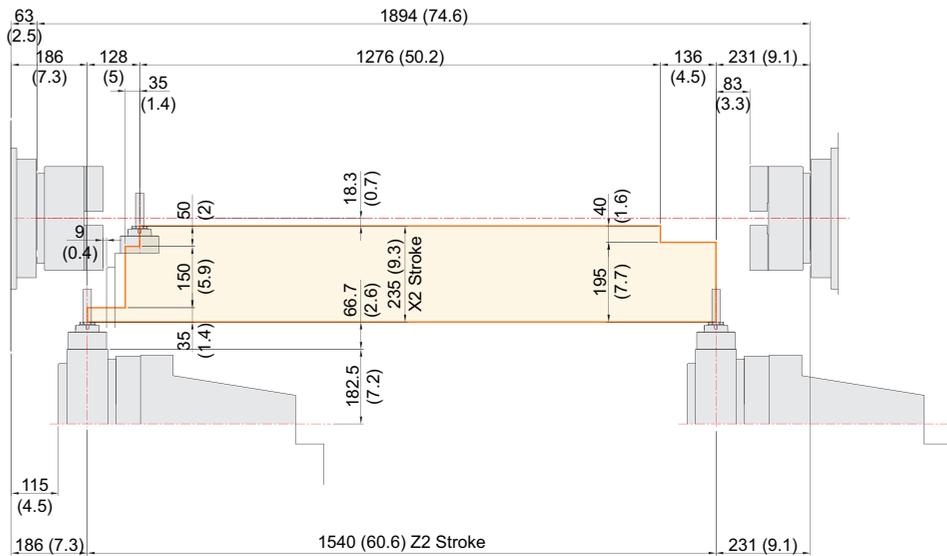

SPECIFICATIONS

Specifications

[] : 선택사양

ITEM		XM2600ST	
CAPACITY	Max. Turning Dia. (Mill/Turret)	mm(in)	Ø660 (Ø26")/Ø410 (Ø16.1")
	Max. Turing Length	mm(in)	1,540 (60.6")
	Bar Capacity	mm(in)	1st : Ø81 (Ø3.2") 2nd : Ø81 (Ø3.2")
SPINDLE	Chuck Size	inch	1st : 10" 2nd : 10"
	Spindle Speed	r/min	1st : 4,000 2nd : 4,000
	Spindle Power (Max./Cont.)	kW(HP)	1st : 30/22 (40/29.5) 2nd : 30/22 (40/29.5)
	Spindle Torque (Max./Cont.)	N·m(lbf·ft)	1st : 724/410 (534/302.4) 2nd : 724/410 (534/302.4)
	Spindle Bore	mm(in)	1st : Ø91 (Ø3.6") 2nd : Ø91 (Ø3.6")
	Spindle Driving Method	-	BUILT-IN MOTOR
	Spindle Nose	-	1st : A2-8 2nd : A2-8
	C axis indexing Angle	deg	1st : 0.0001° 2nd : 0.001°
FEED	Travel (X1/Z1/Y/X2/Z2/ZB)	mm(in)	695/1,585/300/235/1,540/1,540 (27.4"/11.8"/62.4"/9.3"/60.6"/62.8")
	Travel (B)	deg	240° (±120°)
	Rapid Traverse Rate (X1/Z1/Y/X2/Z2/ZB)	m/min (ipm)	48/48/36/24/36/30 (1,890/1,890/1,417/945/1,417/1,575)
	Slide Type	-	LM GUIDE
	Y Axis Structure	-	Cross Type
MILL HEAD	Speed	r/min	12,000
	Power (Max./Cont.)	kW(HP)	22/15 (29.5/20)
	Torque (Max./Cont.)	N·m(lbf·ft)	120/67.8 (88.5/50)
	Driven Type	-	BUILT-IN MOTOR
	B Axis Indexing Angle	deg	0.0001°
TURRET	No. of Tools	EA	12
	Tool Size (O.D./I.D.)	-	□ 25/Ø40 (□ 1"/Ø1 1/2")
	Indexing Time	sec/step	0.2
LIVE TOOL (Opt.)	Milling Tool Speed (rpm)	r/min	[5,000]
	Max. Power	kW(HP)	[6.7 (9)]
	Max. Torque	N·m(lbf·ft)	[27 (19.9)]
	Type	-	[BMT65]
ATC	No. of Tools	EA	40 [80]
	Tool Shank Type	-	CAPTO C6
	Max. Tool Dia. (W.T/W.O)	mm(in)	Ø90/Ø130 (Ø3.5"/Ø5.1")
	Max. Tool Length	mm(in)	450 (17.7")
	Max. Tool Weight	kg(lb)	12 (26.5)
	Tool Selection Method	-	FIXED ADDRESS
TANK CAPACITY	Coolant Tank	ℓ (gal)	620 (163.8)
	Lubricating Tank (Axis/Mill Head)	ℓ (gal)	3/1.8 (0.8/0.5)
POWER SUPPLY	Electric Power Supply	kVA	78
	Thickness of Power Cable	sq	Over 70
	Voltage	V/Hz	220/60 (200/50)
MACHINE	Floor Space(L×W)	mm(in)	5,151×3,240 (202.8"×127.6")
	Height	mm(in)	2,800 (110.2")
	Weight	kg(lb)	18,000 (39,683)
CNC	Controller	-	FANUC 31i-B5 PLUS

Specifications are subject to change without notice for improvement.

CONTROLLER

FANUC 31i-B5 PLUS

Controlled axis / Display	
Control axes	9 axes (X1, Y1, Z1, B1, X2, Z2, A, C1, C2)
Simultaneously controlled axes	Max. 5 axes
Least setting Unit	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, B axes : 1 deg [0.001] deg
Least input increment	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, B axes : 1 deg [0.001] deg
Inch / Metric conversion	G20 / G21
Machine lock	All axes
Stored stroke check 1	
Mirror image	
Follow-up	
Backlash compensation	+/- 0~9999 pulse (Rapid traverse / Cutting feed)
Position switch	
Pitch error compensation	
LCD/MDI	15" color LCD
Operation	
DNC operation by the memory card	
Program restart	
Program check function	Dry run, Program check
Single block	
Feed function	
Manual jog feed	Rapid, Jog, handle
Manual handle	x1, x10, x100 pulses
Feedrate override	0~200% (10% Unit)
Jog feed	0~5,000 mm/min (197 ipm)
Rapid traverse override	F1, F25%, F50%, F100%
Override cancel	
Rapid traverse bell-shaped acceleration / deceleration	
Auto corner override	
Program input & Interpolation functions	
Interpolation Function	Positioning/Linear/Circular (G00/G01/G02/G03)
Exact stop mode / Exact stop	G61 / G09
Dwell	G04, 0~9999.9999sec
Helical interpolation	
Threading/synchronous feed	
Manual reference point return	
Reference point return	G28
Reference point return check	G27
2nd Reference point return	G30
Program stop/end	M00, M01/M02, M30
Optional block skip	1 ea
Max. programmable dimensions	+/- 9999.9999" (+/- 8digit)
Program number / Sequence number	O4 / F8 digit
Absolute/incremental command	G90 / G91
Plane selection	G17, G18, G19
Work coordinate preset	G52~G59
Work coordinate system	G54.1 P1~P48 (48 pair)
Manual absolute	"On" fixed
Programmable data input	G10
Sub program call	10 Step
Custom macro	
Addition of custom macro	#100~#199, #500~#999
Work coordinate Command	G15, G16
Work coordinate Interpolation	G12.1, G13.1
Helical interpolation	G07.1
Circular interpolation	G02, G03
Canned cycle	G73, G74, G76, G80 ~ G89
Optional chamfering/corner R	
Skip function	G31
Automatic coordinate system setting	
Coordinate system rotation	G68, G69
Programmable mirror image	G50.1, G51.1
Bidirectional pitch error compensation	
AI contour control(AICC) II	1,000 Block
Conversational Program	Smart Guide-i

Sub / Spindle functions	
Miscellaneous function	M 4 digit
Spindle speed command	S 5 digits, binary output
Spindle speed override	0% ~ 150% (10% Unit)
Spindle orientation	
Rigid tapping	
Tool functions / Tool compensation	
Tool function	Max.T3/T4 digits
Cutter compensation C	G40~G42
Tool length compensation	G43, G44, G49
Tool length measurement	Z axis INPUT C
Tool offset pairs	400 pair
Tool life management	
Data input / Output & Editing functions	
Input/output interface	Memory card
Embedded Ethernet	100 Mbps
Part program storage length	4M (1,024m)
Registered programs	100 ea
Memory lock	
Back ground editing	
Extended part program editing	Copy, move, change of NC program
Setting, display, diagnosis	
Self-diagnosis function	
History display	Alarm & operator message
Run hour / Parts count display	
Actual cutting feedrate display	
Graphic display	
Spindle / Servo setting screen	
Multi-language display	Selection of 5 optional language
Screen Saver	
Auto Data Backup	
Option	
Additional work coordinate system	G54.1 P1~P300 (300±)
Single direction positioning	G60
Scaling	
Manual handle interrupt	
Data server	1 GB
High speed ethernet	100 Mbps
Tool load monitoring function	HWTM (Mounted)

Figures in inch are converted from metric values.


The FANUC controller specifications are subject to change based on the policy of company CNC supplying.

HYUNDAI WIA ECO SYSTEM


MQL (Minimal Quantity Lubrication)

The goal of this system is to spray only the amount of lubricant required to prevent heat and chip build up at the cutting tool or work piece face.

Example of Machining Center Application

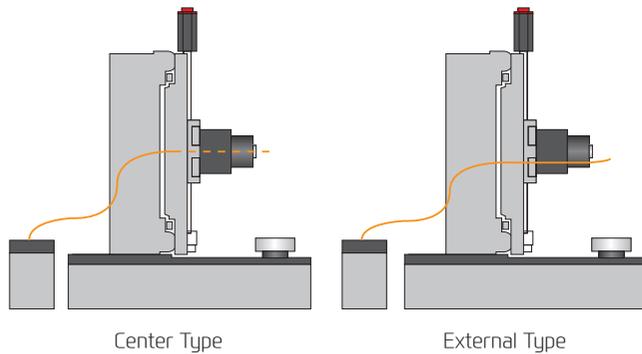

Example of Etc.

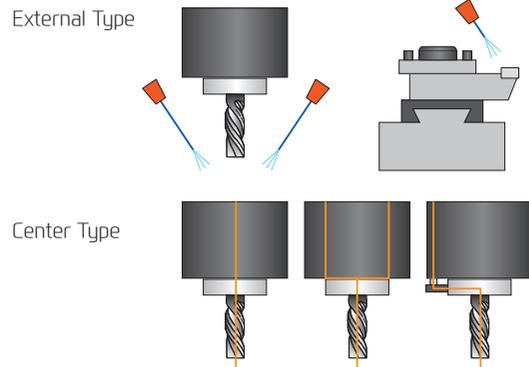


Oil Skimmer

An oil skimmer can increase coolant and tool life by removing tramp oil contaminants.



Mist Collector

Mist Collector reduces the amount of smoke and oil mist in the air. This helps build a safe and comfortable working environment and improve durability.

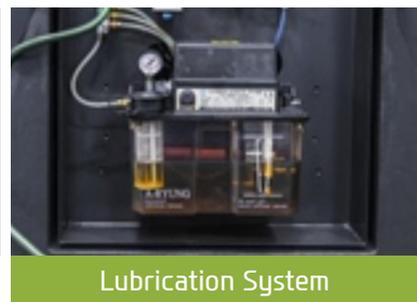

Lubrication System

By applying lubricant only when the machines axis are moving lubrication consumption is reduced by compared to standard systems.

HYUNDAI WIA ENERGY SAVING

HW-ESS (HYUNDAI WIA Energy Saving System)

HYUNDAI WIA Machine tool provides the optimum power saving function that can easily save energy with an intuitive user interface.



1. Machine-ready power saving function : Put all servo motors and other motors into sleep mode when no control or operation is done for a set time
2. Work light auto-off function : The work light is turned off automatically when no control or operation is done for a set time
3. Chip conveyor auto power saving : Operation/non operation time (timer) can be set to save energy
4. Auto Power-off : Auto power off after ending the an operation after a period of time
5. Eco function : Machine ready sleep mode can be activated/de-activated from the controller panel
6. Power consumption monitor : Real time power consumption can be monitored through the OP screen



You Tube HYUNDAI WIA MT
www.youtube.com/HYUNDAIWIAMT

CREATING VALUE IN SEAMLESS MOBILITY

With its top-quality HYUNDAI WIA machine tool creates a new and better world.



<http://machine.hyundai-wia.com>
HYUNDAI WIA Machine Tools
Global Links

HEADQUARTER

Changwon Technical Center/R&D Center/Factory 153, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea TEL : +82 55 280 9114 FAX : +82 55 282 9114

Overseas Sales Team /R&D Center 37, Cheoldobangmulgwan-ro, Uliwang-si, Gyeonggi-do, Korea TEL : +82 31 8090 2539

OVERSEAS OFFICES

HYUNDAI WIA Machine America corp. 450 Commerce Blvd, Carlstadt, NJ 07072, USA TEL : +1-201-987-7298

HYUNDAI WIA Europe GmbH Alexander-Fleming-Ring 57, 65428 Rüsselsheim Germany TEL : +49-0-6142-9256-0

HYUNDAI WIA Machine Tools China 2-3F, Bldg6, No.1535 Hongmei Road, Xuhui District, Shanghai, China TEL : +86-21-6427-9885

India Branch Office #4/169, 1st Floor, LOTTE BLDG, Rajiv Gandhi Salai, (OMR), Kandanchavadi, Chennai - 600096, Tamilnadu, India TEL : +91-76-0490-3348